




# The VITAL LINK

For the tough job of connecting the T/V Camera to the control van something extra in the way of a trailing cable system is needed. This is well provided for in BICC T/V Camera Cables with moulded-on Polypole Couplers.

Take the 22-core cable for instance: by the use of single wire conductors the diameter is reduced to only .850 in.—two-thirds the size of its conventional stranded wire equivalent! And the Polypole Coupler, integrally moulded to the cable end, reduces the possibility of conductor breakage to a minimum.

Truly a perfect combination built for the job—and it bears the BICC hallmark of dependability.

Our technical staff will be pleased to discuss this new development with you.

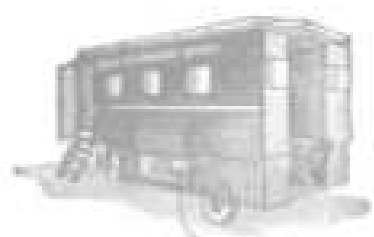

## T/V CAMERA CABLES AND COUPLERS

BRITISH INSULATED CALLENDER'S CABLES LIMITED  
NORFOLK HOUSE, NORFOLK STREET, LONDON, W.C.2